




ORC SERIES

OKADA's ORC rotating pulverizers were developed as a result of a growing need to reduce disposal volume and recycle concrete waste created during concrete building demolition. The lat, wide jaw design and an internal speed valve make it possible to grab and crush large sections of concrete quickly.

FEATURES

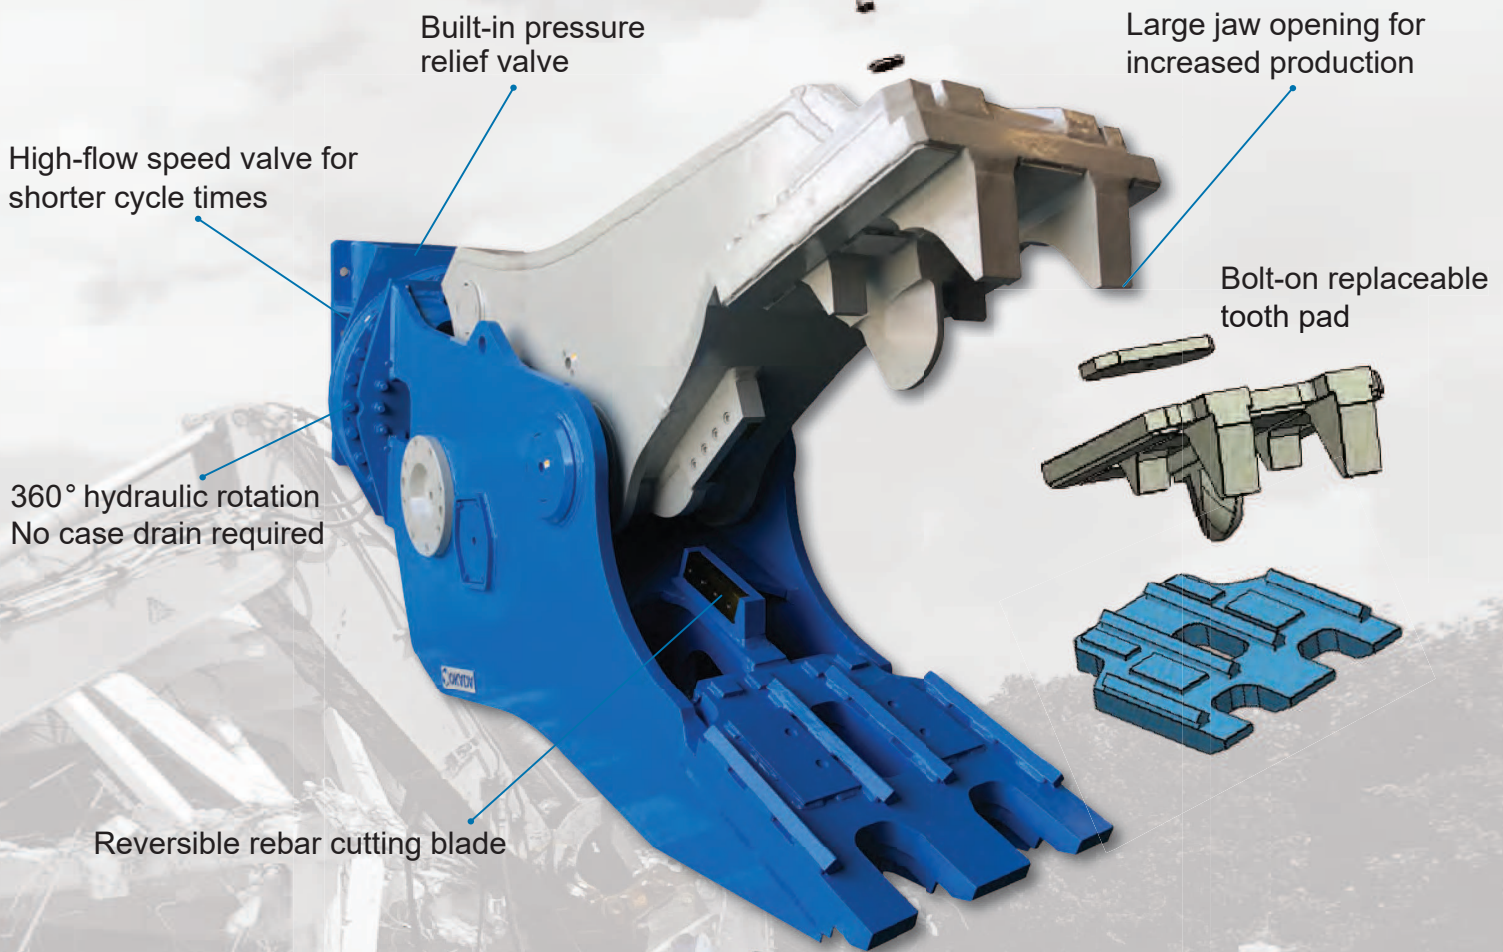

APPLICATIONS

Primary demolition

- Concrete
- Single-step recycling

Secondary demolition

- Separating concrete from rebar
- Cuts rebar as needed



see the ORC in action



ROTATING PULVERIZERS



SPECIFICATIONS

	MODELS	ORC-220A	ORC-380A
INFORMATION			
Carrier Class	1000 lb	48 - 84	71 - 110
	m ton	22 - 38	32 - 50
Operating Weight	lb	5896	9900
	kg	2673	4491
Overall Length	inch	89	111
	mm	2255	2825
Overall Height	inch	48.4	58.9
	mm	1230	1495
Max. Jaw Opening	inch	33	36
	mm	835	915
Cutting Blade Length	inch	7.1	8.5
	mm	180	215
FORCE			
Crushing Force at Center	sh ton	84	125
	kN	750	1110
HYDRAULICS			
Oil Flow Range	gpm	106	132
	lpm	400	500
Operating Pressure	psi	4641	4641
	bar	320	320

Specifications are subject to change without notice.
 Specifications assume the use of an OKADA Universal Pin Mount is used.