


ASG SERIES

SILENT GRAPPLE

The ASG silent grapple is used for demolition of wooden structures, scrap handling, loading, sorting and other applications.

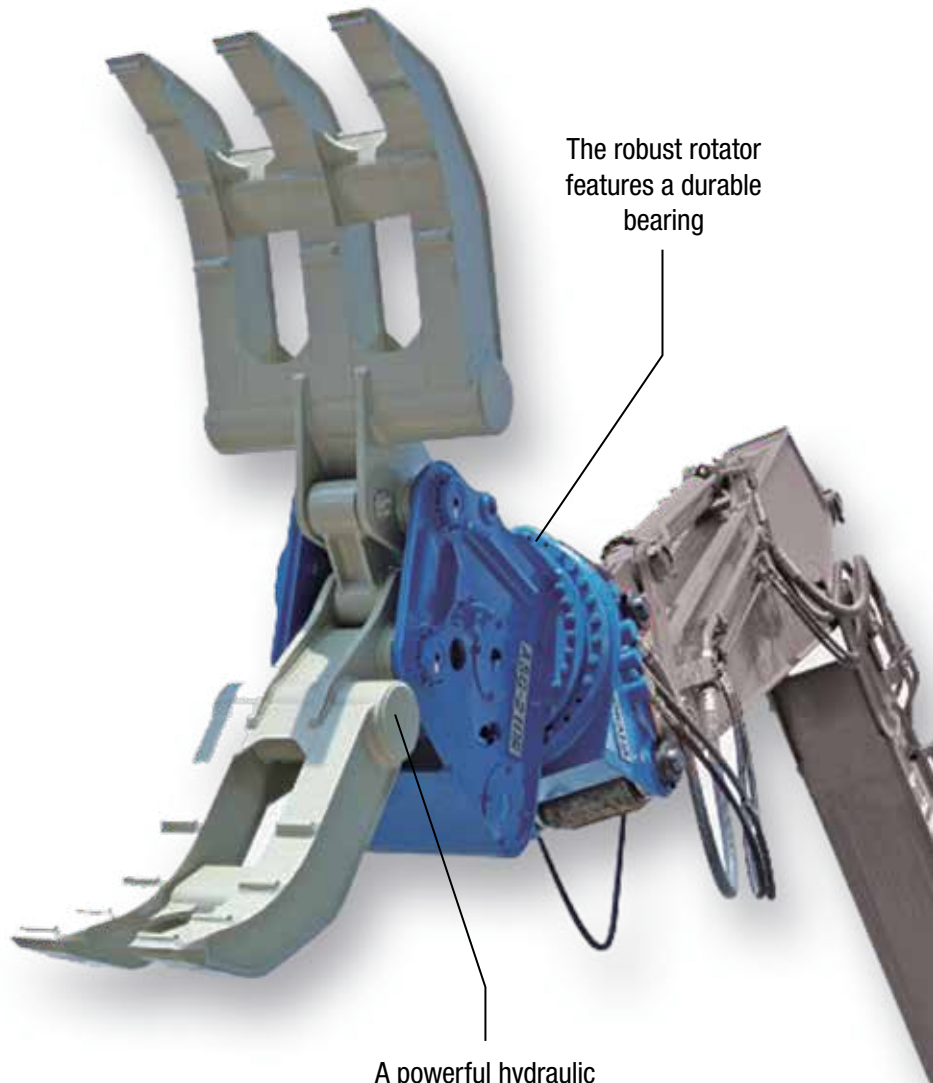

The robust rotator features a durable bearing

A powerful hydraulic motor provides easy rotation of long, heavy objects

SPECIFICATIONS

		ASG-30R / RD	ASG-60R	ASG-130R / RDF	ASG-210R
Operating weight	lbs	575 / 585	1170	2140 / 2185	3510
	kg	260 / 265	530	970 / 990	1590
Oil flow	gpm	Up to 11	Up to 16	Up to 26	Up to 53
	lpm	Up to 40	Up to 60	Up to 100	Up to 200
Operating pressure	psi	3600 / 3000	4000	4000	4000
	bar	250 / 210	280	280	280
Overall length	inches	55.9	73.2	88.8	102.8
	mm	1420	1860	2255	2610
Max. claw opening	inches	43.3	65.0	72.0	91.9
	mm	1100	1650	1830	2335
Claw width (3 / 2)	inches	11.6 / 6.1	18.9 / 10.6	23.6 / 13.4	31.5 / 18.1
	mm	295 / 155	480 / 270	600 / 340	800 / 460
Claw depth (3/2)	inches	25.8	33.7	37.6	47.2
	mm	655	855	955	1200
Carrier weight range	1000 lbs.	5-12	13-20	22-35	40-56
	metric tons	3-5	6-9	10-16	18-25

Specifications are subject to change without notice and assume the use of an Okada universal pin mount. The solenoid valve installed on the ASG-30RD and ASG-130RDF is used in breaker piping.