



RECYCLING PRODUCT LINE-UP

August 2021



ASG Series

OMC Series




C Series



ASG SERIES

SILENT GRAPPLE

The ASG silent grapple is used for demolition of wooden structures, scrap handling, loading, sorting and other applications.

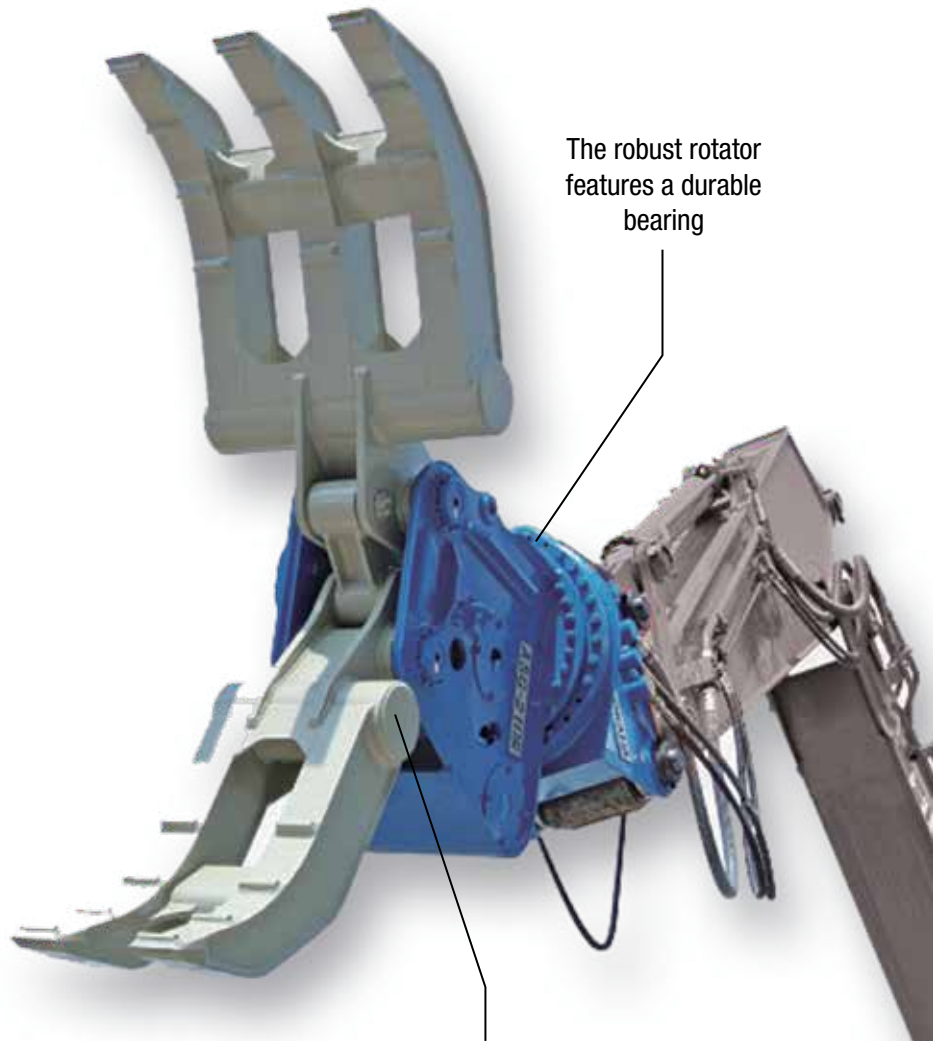

The robust rotator features a durable bearing

A powerful hydraulic motor provides easy rotation of long, heavy objects

SPECIFICATIONS

		ASG-30R / RD	ASG-60R	ASG-130R / RDF	ASG-210R
Operating weight	lbs	575 / 585	1170	2140 / 2185	3510
	kg	260 / 265	530	970 / 990	1590
Oil flow	gpm	Up to 11	Up to 16	Up to 26	Up to 53
	lpm	Up to 40	Up to 60	Up to 100	Up to 200
Operating pressure	psi	3600 / 3000	4000	4000	4000
	bar	250 / 210	280	280	280
Overall length	inches	55.9	73.2	88.8	102.8
	mm	1420	1860	2255	2610
Max. claw opening	inches	43.3	65.0	72.0	91.9
	mm	1100	1650	1830	2335
Claw width (3 / 2)	inches	11.6 / 6.1	18.9 / 10.6	23.6 / 13.4	31.5 / 18.1
	mm	295 / 155	480 / 270	600 / 340	800 / 460
Claw depth (3/2)	inches	25.8	33.7	37.6	47.2
	mm	655	855	955	1200
Carrier weight range	1000 lbs.	5-12	13-20	22-35	40-56
	metric tons	3-5	6-9	10-16	18-25

Specifications are subject to change without notice and assume the use of an Okada universal pin mount. The solenoid valve installed on the ASG-30RD and ASG-130RDF is used in breaker piping.

OMC SERIES


WOOD CUTTER

OMC wood cutters are used to process logging materials, root balls, stumps, and other wood products.

For stump processing
OMC170PG



Rotating models (ARTS/HR) and fixed models are available

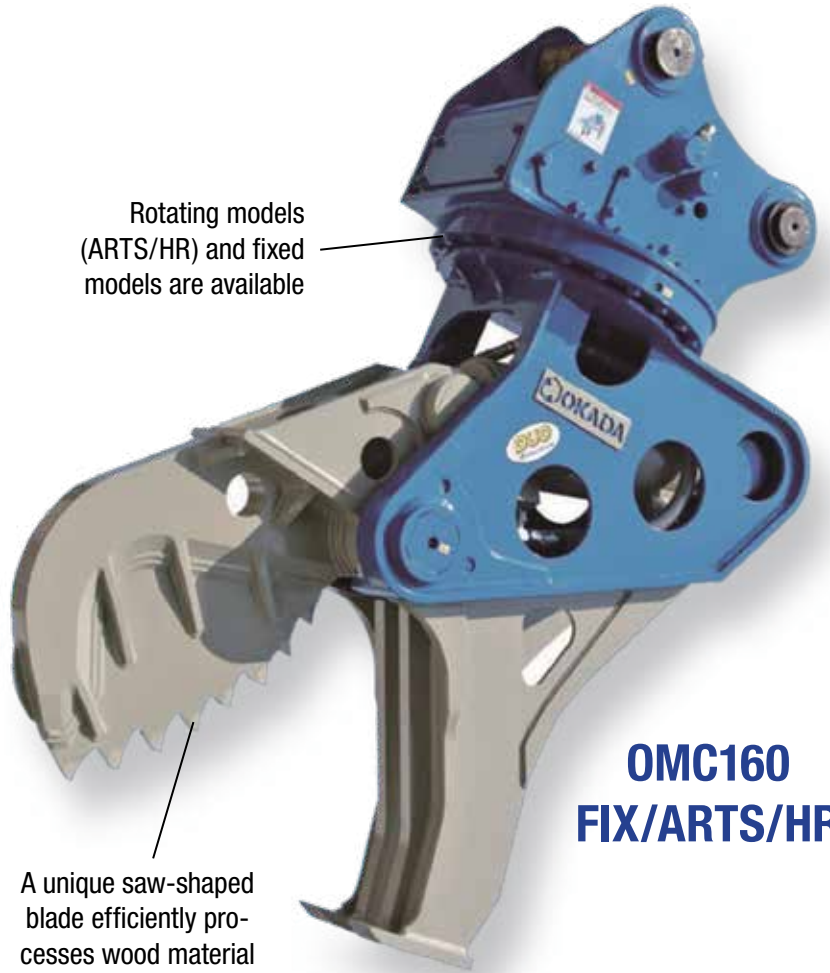

OMC160
FIX/ARTS/HR

A unique saw-shaped blade efficiently processes wood material




SPECIFICATIONS

		OMC160 ARTS / HR	OMC160 FIX	OMC170PG ARTS / HR
Operating weight	lbs	3110 / 3045	2405	3087 / 3045
	kg	1410 / 1380	1090	1400 / 1380
Oil flow	gpm	26-106	26-106	26-106
	lpm	100-400	100-400	100-400
Operating pressure	psi	4600	4600	4600
	bar	320	320	320
Overall length	inches	82.7	66.9	88.2
	mm	2100	1700	2240
Overall width	inches	62.8	62.8	67.3
	mm	1595	1595	1710
Max. jaw opening	inches	28.0	28.0	34.1
	mm	710	710	865
Crushing force	US tons	39.3	39.3	39.3
	kN	350	350	350
Carrier weight range	1000 lbs	24-48	24-48	24-48
	metric tons	11-22	11-22	11-22

Specifications are subject to change without notice and assume the use of an Okada universal pin mount.

C SERIES CLEAN CUTTER

Hydraulic clean cutters are used to process waste wood, waste plastic, tires and light gauge steel.

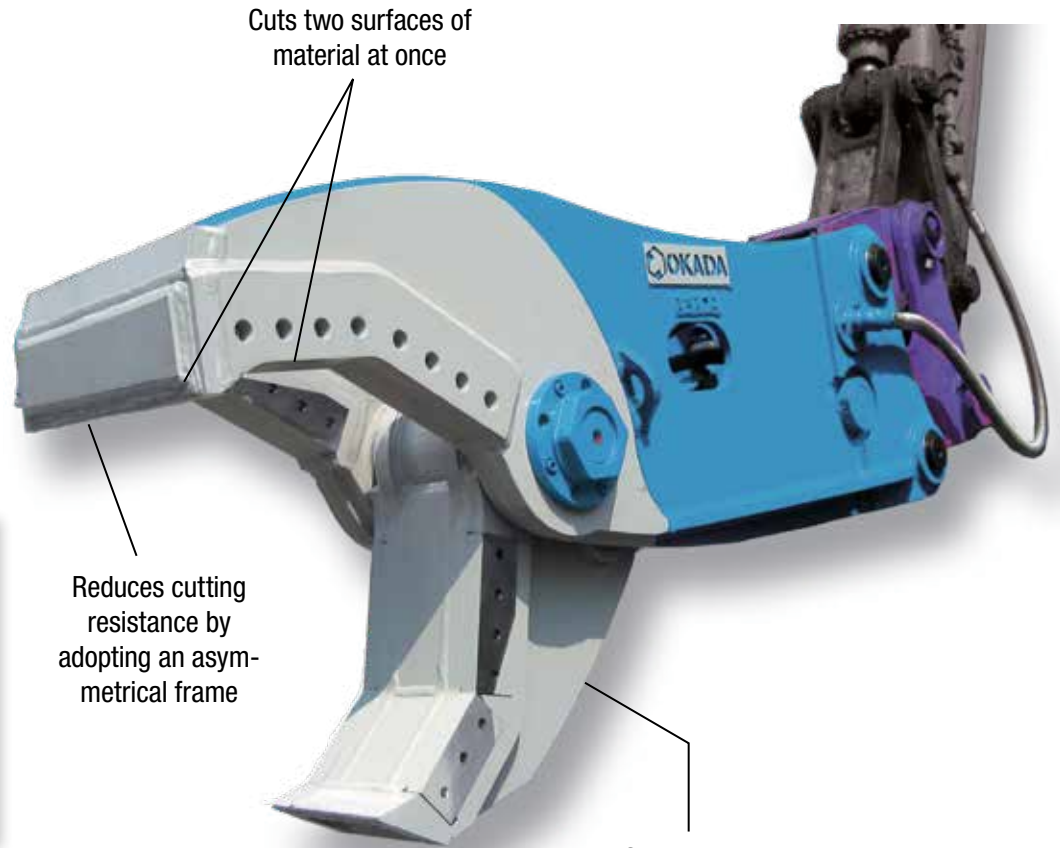

Cuts two surfaces of material at once

Reduces cutting resistance by adopting an asymmetrical frame

The C series gives the operator good visibility for easy operation

SPECIFICATIONS

		C-100	C-200
Operating weight	lbs	2128	3087
	kg	965	1400
Oil flow	gpm	26-53	53-106
	lpm	100-200	200-400
Operating pressure	psi	4600	4600
	bar	320	320
Overall length	inches	67.9	76.6
	mm	1725	1945
Max. claw opening	inches	23.8	27.8
	mm	605	705
Ripping blade length	inches	9.6 / 17.3	10.8 / 19.5
	mm	245 / 440	275 / 495
Cutter blade length	inches	15.7 / 18.1	18.1 / 21.7
	mm	400 / 460	460 / 550
Crushing force	US tons	42.7	80.9
	kN	380	720
Carrier weight range	1000 lbs.	22-28	40-46
	metric tons	10-13	18-21

Specifications are subject to change without notice and assume the use of an Okada universal pin mount.



Okada America Inc.

12950 SE Hwy212 Bldg.D
Clackamas OR, 97015
Tel 503-557-7033
FAX 503-557-7779

904 Medina Rd.
Medina, OH 44256
Tel 330-239-2666
FAX 330-239-367

3575 Windmill RD.,
Bldg. #2
Joshua, TX 76058
www.okadaamerica.com

We care about the environment. Printed on 100% recycled paper.